

CGTF BGP RIS Platform

1. Introduction


Routing Information Service (RIS) employs a globally distributed set of Remote Route Collectors (RRCs), typically located at Internet Exchange Points, to collect and store Internet routing data.

RIS is a very important service for Internet, which provides data support for Internet routing research community. For example, network operators can observe their networks from different locations with RIS, get a better understanding of their network. Moreover, routing archive data can also help network operators and researchers review historical Internet events.

There are some well-known routing information collection sharing projects such as Route Views and RIPE RIS , PCH etc . However, most of their vantage points are in Europe and the United States, lacking routing information from Asia. Our project mainly collects routing data of several major research and education backbones in our Asian region for administrators and researchers to observe and study the Internet. Moreover we will follow up with a real-time one like BGPmon and will do some hijacking detection work.

2. Architecture

The collector establishes a connection with the border router to collect routing information, while periodically exporting data for archiving and providing an interface to the outside world for users to use. The connection can be achieved in two ways: BMP protocol and normal BGP sessions.

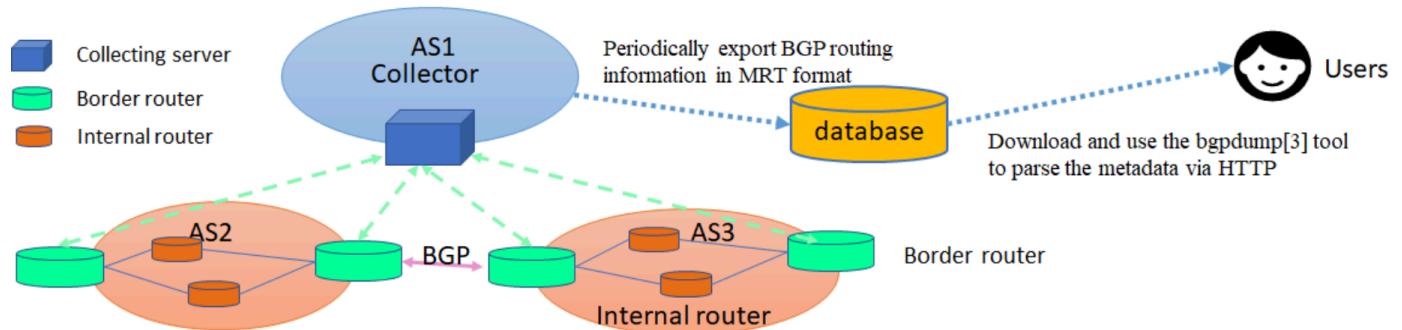

- Collector: A host running Quagga or FRR , which is emulated as a BGP router and can establish connections and exchange routing information with other BGP routers. **Collector only collects BGP routes, does not send any routes to BGP peers, and never forward traffic.**
- Storage Server: A server for storing routing data that runs a timed task to export routing data from Collector at regular intervals.
- Vantage Point: Vantage Point are those routers that establish BGP sessions with the Collector.

3. Our collector

We have deployed two Collectors which installed FRR.

- Our Collector ASN: 65534
- Our Collector1 IPv4 address: 203.188.118.90

- Our Collector1 IPv6 address: 2001:ce0:1:2::3
- Our Collector2 IPv4 address: 203.91.121.227
- Our Collector2 IPv6 address: 2001:da8:217:1213::227

We export routing data periodically, and user can get our route data on: <http://bgp.cgtf.net>

If you have any technical issue , please feel free to contact sec@cgf.net.

4. Router Configuration

Just have your border router to establish a multi-hop eBGP session with our Collector.

Specifically, you need to:

1. **Choose a border gateway router** in your AS to establish an eBGP session with our Collector(47.241.43.108).
2. Provide us with your **router information , including ASN, IPv4 address, and IPv6 address**.
3. Conducting **both IPv4 and IPv6 multi-hop eBGP session** configuration with our Collector.

Notes:

- Here is the configuration example:

FRR or Cisco:

```

router bgp <your ASN>
bgp router-id <your Router IP>
bgp log-neighbor-changes
no bgp default ipv4-unicast
timers bgp 15 45
neighbor remote-as 65534
neighbor 203.188.118.90 description CGTF Collector
neighbor 203.188.118.90 ebgp-multipath 255
!neighbor 2001:ce0:1:2::3 remote-as 65534
!neighbor 2001:ce0:1:2::3 description CGTF Collector
!neighbor 2001:ce0:1:2::3 ebgp-multipath 255
!
address-family ipv4 unicast
neighbor 203.188.118.90 activate
neighbor 203.188.118.90 prefix-list DENY-ALL in
neighbor 203.188.118.90 route-map RNE-out out
neighbor 203.188.118.90 update-source <your-ip>
exit-address-family
!
address-family ipv6 unicast
neighbor 203.188.118.90 activate
neighbor 203.188.118.90 DENY-ALLv6 in
neighbor 2001:ce0:1:2::3 activate
neighbor 2001:ce0:1:2::3 DENY-ALLv6 in

```

```

neighbor 2001:ce0:1:2::3 RNE-out out
neighbor 2001:ce0:1:2::3 update-source <your-ip>
exit-address-family
!
ip prefix-list DENY-ALL seq 5 deny 0.0.0.0/0 le 32
!
ipv6 prefix-list DENY-ALLv6 seq 5 deny ::/0 le 128
!
route-map RNE-out permit 10
  description Match R&E networks
  match community rne
!
route-map RNE-out deny 20
  description Deny everything else
!

```

Juniper:

```

top edit policy-options
set policy-statement DENY-ALL term END then reject

set policy-statement ANNOUNCE-RNE term RNE from family inet
set policy-statement ANNOUNCE-RNE term RNE from protocol bgp
set policy-statement ANNOUNCE-RNE term RNE from community RNE
set policy-statement ANNOUNCE-RNE term RNE from route-type external
set policy-statement ANNOUNCE-RNE term RNE then accept
set policy-statement ANNOUNCE-RNE term END then reject

set policy-statement ANNOUNCE-RNEv6 term RNE from family inet6
set policy-statement ANNOUNCE-RNEv6 term RNE from protocol bgp
set policy-statement ANNOUNCE-RNEv6 term RNE from community RNE
set policy-statement ANNOUNCE-RNEv6 term RNE from route-type external
set policy-statement ANNOUNCE-RNEv6 term RNE then accept
set policy-statement ANNOUNCE-RNEv6 term END then reject

top edit protocols bgp
set group CGTF-View type external
set group CGTF-View local-address LOCAL_ADDRESS
set group CGTF-View import DENY-ALL
set group CGTF-View family inet unicast
set group CGTF-View export ANNOUNCE-RNE
set group CGTF-View neighbor 203.188.118.90 description "CGTF Collector"
set group CGTF-View neighbor 203.188.118.90 multihop ttl 255
set group CGTF-View neighbor 203.188.118.90 peer-as 65534

set group CGTF-Viewv6 type external
set group CGTF-Viewv6 local-address LOCAL_V6_ADDRESS
set group CGTF-Viewv6 import DENY-ALL
set group CGTF-Viewv6 family inet6 unicast
set group CGTF-Viewv6 export ANNOUNCE-RNEv6
set group CGTF-Viewv6 neighbor 2001:ce0:1:2::3 description "CGTF Collector"

```

```
set group CGTF-Viewv6 neighbor 2001:ce0:1:2::3 multihop ttl 255
set group CGTF-Viewv6 neighbor 2001:ce0:1:2::3 peer-as 65534
```

5. Benifit you can get

- Contribute data to the Internet routing research community that will help your own network administrators and researchers **gain a better understanding of your network** and help to **identify problems in your network**.
- You can check the historical routing data of your network to help you **review the historical anomaly events in your network**
- Route data is publicly available, partners can **download data** from <http://bgp.cgtf.net/> anywhere and anytime